


Hybrid Stepper Motor CS-M23480 with Encoder

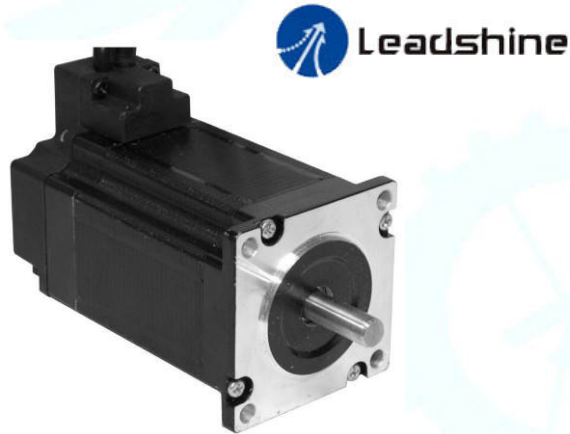

Features:

- 2-phase hybrid stepper motor
- 1000-lines/Rev. encoder
- Standard NEMA 34 dimensions
- High torque design

Product Specification:

The CS-M23480 two-phase stepper motor with encoder feedback is designed to work with the Leadshine Hybrid Servo Drive CS-D808 or CS-D1008 to build a hybrid servo closed loop system (no loss of steps anymore).

General Specification:

	CS-M23480	Einheit
Step Angle	1.8	Degree °
Holding Torque	8.0	Nm
Phase Current	6.0	A
Phase Resistance $\pm 10\%$	0.44	Ω
Phase Inductance $\pm 20\%$	3.73	mH
Inertia	2700	gcm ²
Weight	4.0	kg
Encoder Resolution	1000	Steps/rev.

Encoder Spezifikation:

Parameter	Min	Typical	Max	Unit
Operating Temperature	-40	-	100	°C
Supply Voltage	4.5	5	5.5	V DC
Output Current per Channel	-1	-	5	mA
Low Level Output Voltage	-	-	0.4	V DC
High Level Output Voltage	2.4	-	-	V DC
Count Frequency	-	-	100	KHz


Hybrid Stepper Motor CS-M23480 with Encoder

Encoder Extension Cable:



Pin	Name	Color	Description
1	EA+	Black	Encoder Channel A+
2	VCC	Red	+5V Power Input
3	GND	White	Ground (for power input)
4	NC	-	Not Connected
5	NC	-	Not Connected
6	NC	-	Not Connected
7	NC	-	Not Connected
8	NC	-	Not Connected
9	NC	-	Not Connected
10	NC	-	Not Connected
11	EB+	Yellow	Encoder Channel B+
12	EB-	Green	Encoder Channel B-
13	EA-	Blue	Encoder Channel A-
14	NC	-	Not Connected
15	NC	-	Not Connected


Motor Extension Cable:

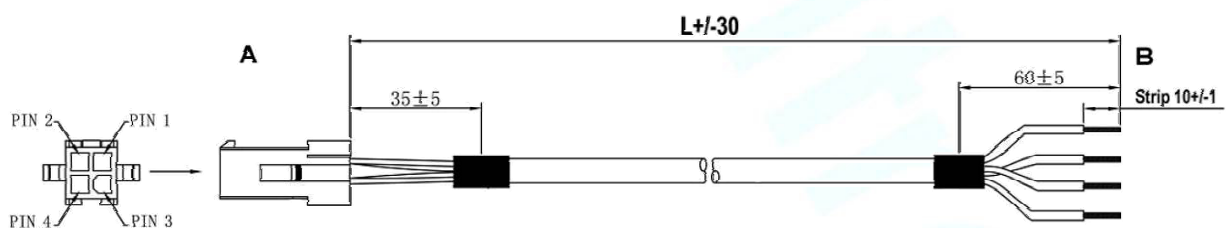


Pin	Name	Color	Description
1	B-	Blue	Phase B-
2	A-	Red	Phase A-
3	A+	Black	Phase A+
4	B+	Yellow/Green	Phase B+

Hybrid Stepper Motor CS-M23480 with Encoder


Motor Wiring Diagram:

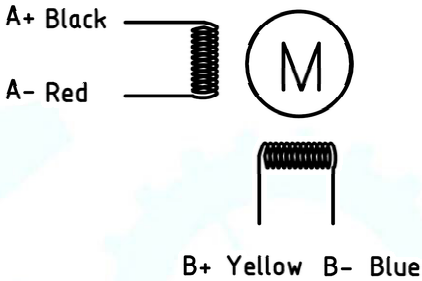

Mechanical Dimensions:

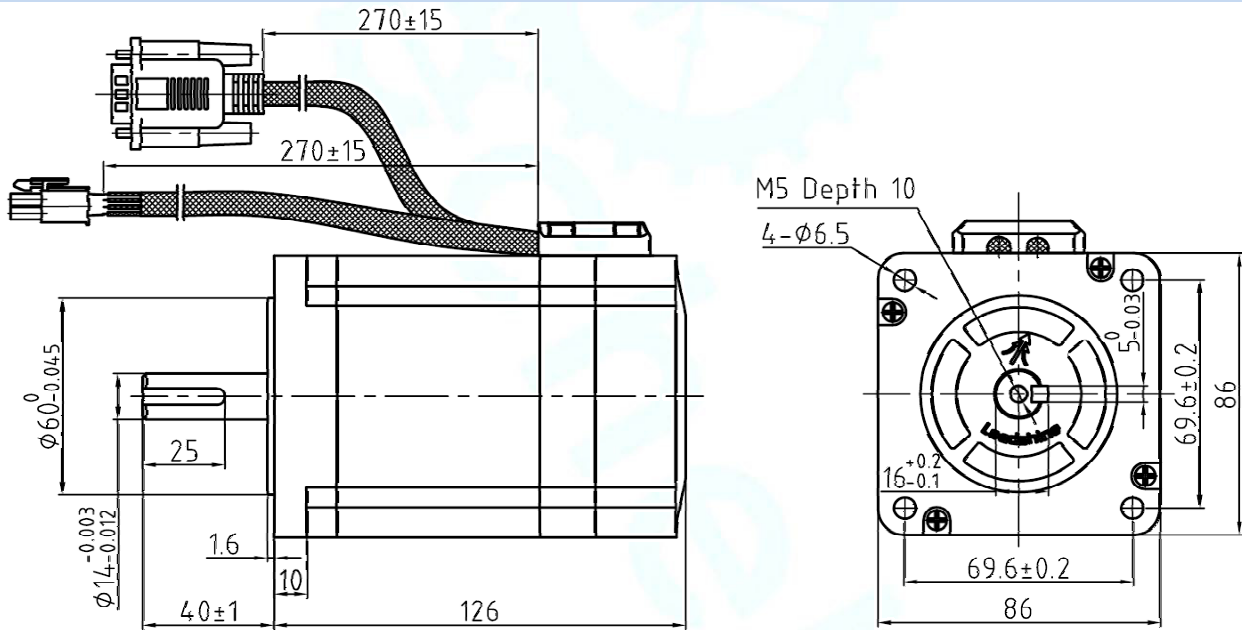

Torque Curve:

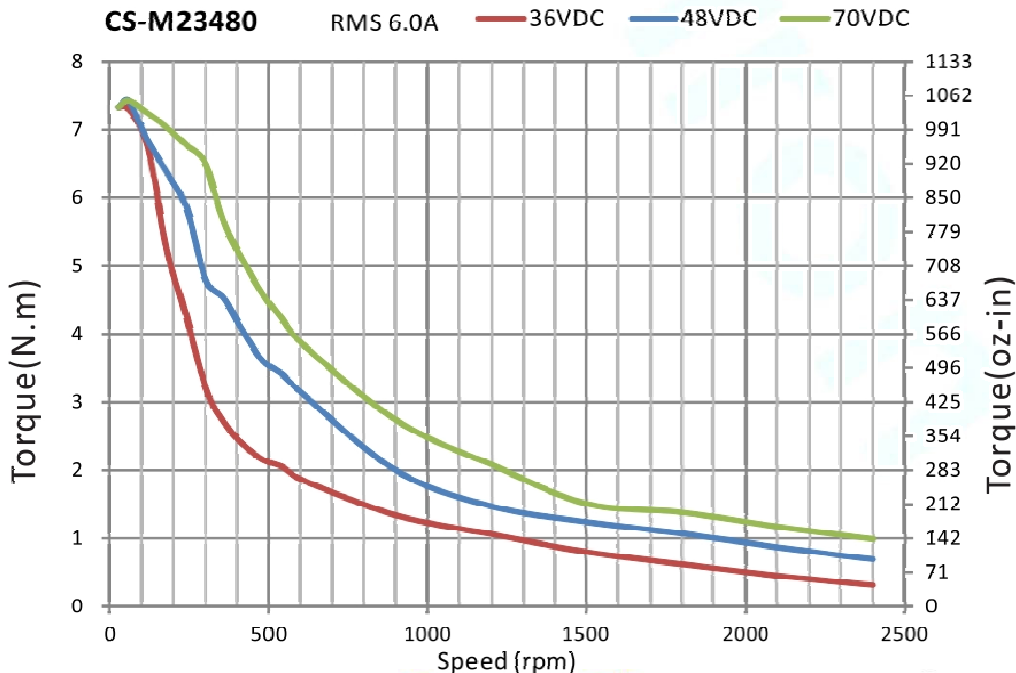

Right of techn. modifications is reserved

Technische Änderungen vorbehalten